# LUCATRON
## keep contact
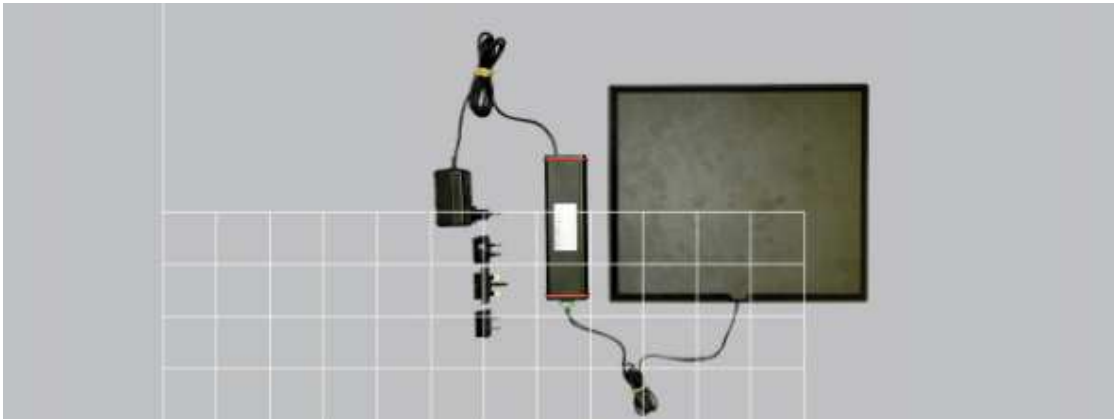
# Label Deactivator - DAV-200

## DAV-200

8.2 MHz Label Deactivator DAV-200

Our Deactivator is used to deactivate EAS Labels at the point-of-sale. It can also detect non-deactivatable labels or hard Tags.

The effective deactivation height of the DAV-200 is up to 30 cm (12 inches). This, in combination with its deactivation speed and the wide variety of antennas available, makes the DAV-200 suitable for all applications
(e.g. checkout, retail).



### Deactivator
### Mechanical Specifications

| | |
|---|---|
| Dimensions (w/o connectors) W/H/D | 57x35x198 mm (2.3x1.4x7.8 inches) |
| Weight | 262 g (9.2 oz) |

### Electrical Specifications

| | |
|---|---|
| Frequency Range | 7.6–8.8 MHz |
| Pulse Time | 10 µsec |
| Pulse Repeat Factor | −200/sec (free running) |
| Synchronization | Yes |
| Power Consumption | 12 VDC/200 mA |
| Deactivation Height | Up to 30 cm (12 inches) |
| Buzzer, integrated | Yes |
| Buzzer, external | Optional |

### AC/DC Adapter with Line Synch.
### Mechanical Specifications

| | |
|---|---|
| Dimensions | 79x52x45 mm (3.1x2.0x1.8 inches) |
| Power Plug (multi-national) | EU/UK/US/AA |

### Electrical Specifications

| | |
|---|---|
| Input Voltage | 85–264 VAC 47–63 Hz |
| Output Voltage | 12 VDC/800 mA |

### Options         Part Numbers

| | |
|---|---|
| Deactivation Pad 300x350 mm | DAP-100 Deactivator Pad |
| External Buzzer with cable | BIB-101 External Buzzer |

*Preliminary*